

PRESTO 95905

CHARACTERISTICS

Material

The brass used in the fabrication of our taps complys standars EN-12164, EN-12165 y EN-1982.

Treatment and outside

Nickel-and Chrome plated according to the standard EN-248.

Saline-mist resistance equal to 200 hours, according to the standard ISO-9227.


Permissible water temperature

Improving health regulations, the component materials of the tap's parts can tolerate a temperature going untill 70 degrees.

- Body and button made of Chrome-plated brass, interior parts made of corrosionresistant materials and resistant to the bild-up of calcium.
- Interchangible head containing all the mechanism of the tap.
- Input Male 1/2".
- Flow rate: 9 I/min at 1 bar.
- Automatic closing: 6 ± 2s.
- · With breakwater.
- · Gross Weight: 0,860 kg.

Models

•Ref. 95905

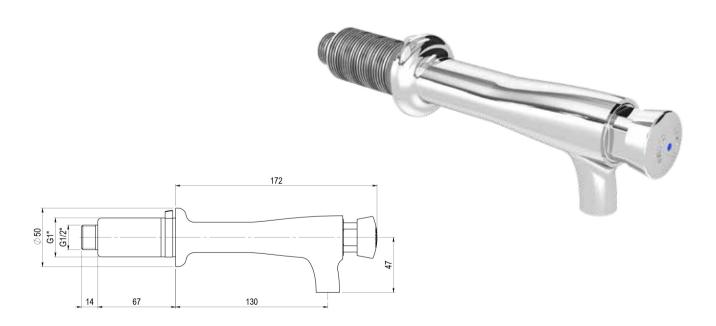

STANDARD

- Certificate ISO 9001.
- Optimizations of dimensioning, water-resistance and hydraulic tests.
 According to the CTE.
- Design according to the European Standard of time Taps EN 816.